



GRILL BURNER

Model # 24-B-06

INSTALLER: Leave these instructions with consumer.
CONSUMER: Retain for future reference.



This burner is for replacement on AOG grills. To install, follow the steps below:

1. **Be sure the barbecue is completely cool and the gas is completely shut off.**
2. Remove cooking grids & flavor grids from the barbecue.
3. Slightly pinch and remove the burner clip (located over the rear center of the burner) from the burner support and set aside (see Fig. 1-1). Then carefully lift the burner from the burner support and out from the hole in the forward fire wall (see Fig. 1-2).
4. Install the new burner over the orifice fitting, sliding it forward, from behind the forward fire wall, so the orifice is centered inside the burner gas inlet, and set it gently onto the burner support (reference Fig. 1-2). The studs on the bottom back of the burner must each fit through their respective holes in the burner support. This is critical to the safe function of the barbecue.
5. Re-install the burner clip (from step 3) around the burner and into the corresponding holes in the burner support (reference Fig. 1-1).
6. Replace the flavor grids and cooking grids in the barbecue.
7. Refer to your barbecue owner's manual for use.

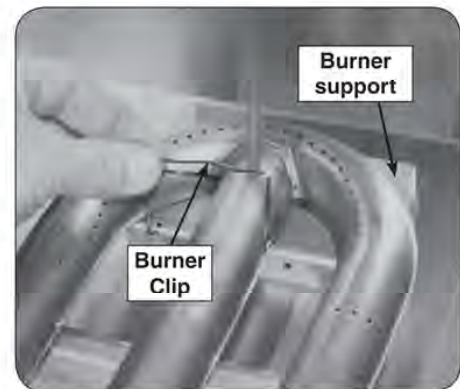


Fig. 1-1 Installing/removing burner clip

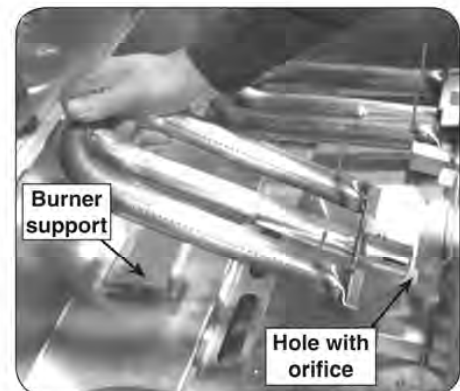


Fig. 1-2 Removing/inserting burner